

RoHS  
Compliant

| B      |          | A        |      |
|--------|----------|----------|------|
| SYMBOL | REVISION | APPROVAL | DATE |
|        |          |          |      |

## SPECIFICATIONS

### 1. 产品材质




- 1.1 塑胶部分: PA66 (UL94V-0)
- 1.2 金属部分: 磷铜镀镍

### 2. 电气特性

- 2.1 额定电流: 15~20A/PIN
- 2.2 额定电压: 48V DC
- 2.3 接触电阻: 30mΩ
- 2.4 绝缘电阻: 100MΩ MIN
- 2.5 耐电压: 500V AC
- 2.6 工作温度: -40°~85°

### 3. 机械特性

- 3.1 插拔力: 2~4KG

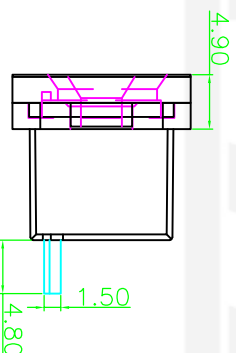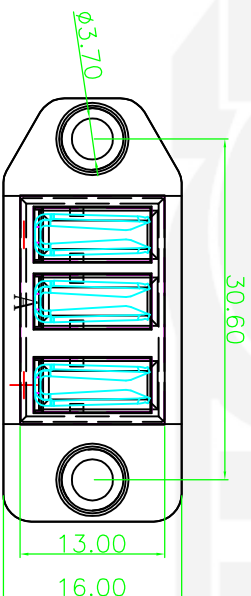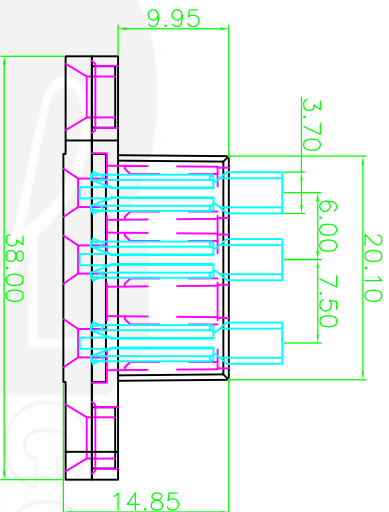

东莞市信音电子科技有限公司

DONGGUAN XINYIN ELECTRONIC TECHNOLOGY CO., LTD.

PART NAME  
PART NO.

CONNECTOR  
SYCBGH01P3DIP

DRAWING  
CHECK

X. L. SU  
X. CHEN

DWG. No.  
REV.

A1

UNIT:  
mm

TOLERANCE  
OTHERWISE

ANGLE  
SCALE

3:1

DATE

09-09-2025

PAGE

1 OF 1

信音达  
XIN·YIN

F

E

D

C

B

A