

RoHS
Compliant

F

E

D

C

B

A

SYMBOL	REVISION	APPROVAL	DATE

SPECIFICATIONS

1. 产品材质


- 1.1 塑胶部分: PA66 (UL94V-0)
- 1.2 金属部分: 磷铜镀镍

2. 电气特性

- 2.1 额定电流: 15~20A/PIN
- 2.2 额定电压: 48V DC
- 2.3 接触电阻: 30mΩ
- 2.4 绝缘电阻: 100MΩ MIN
- 2.5 耐电压: 500V AC
- 2.6 工作温度: -40° ~85°

3. 机械特性

- 3.1 插拔力: 3~5KG

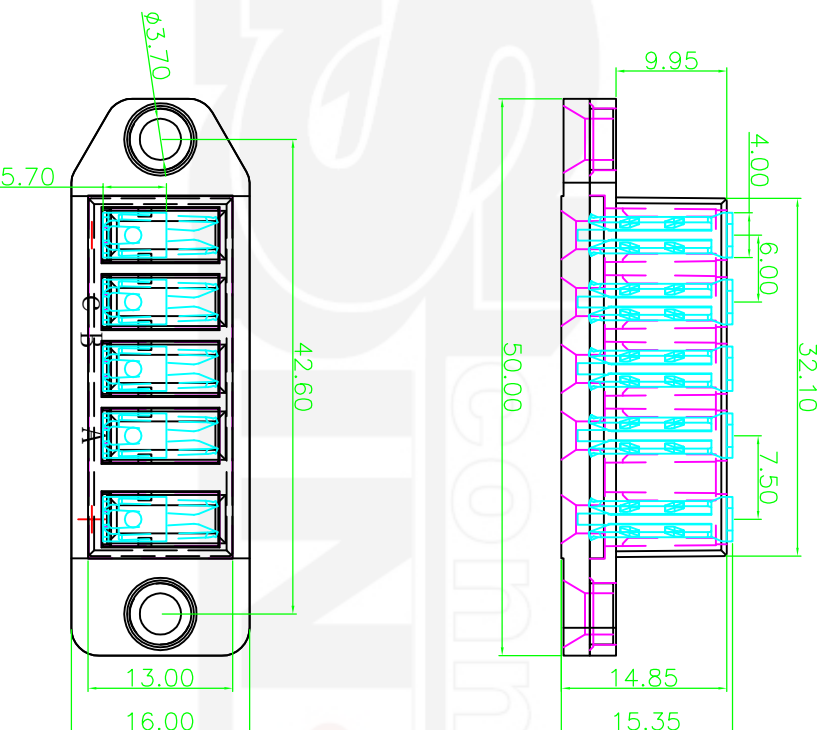

东莞市信音电子科技有限公司

DONGGUAN XINYIN ELECTRONIC TECHNOLOGY CO., LTD.

信音达
XIN·YIN

PART NAME

PART NO.

CONNECTOR

SYCBGHF01P5CSMT

DRAWING

X. L. SU

DWG. No.

CHECK

X. CHEN

REV.

A1

UNIT:

mm

TOLERANCE

OTHERWISE

X.XX ±0.15 X.XX ±0.1°
X.XX ±0.10 X.XX ±0.5°
X.XX ±0.05 X.XX ±0.05°
X.XX ±0.005 X.XX ±0.005

ANGLE

APPROVAL

3:1

DATE

09-09-2025

1 OF 1

0° ±3°

SCALE

PAGE

1 OF 1

1 OF 1