

RoHS
Compliant

B		A	
SYMBOL	REVISION	APPROVAL	DATE

SPECIFICATIONS




1. 产品材质
- 1.1 塑胶部分: PA66 (UL94V-0)
- 1.2 金属部分: 磷铜镀镍

2. 电气特性

- 2.1 额定电流: 15~20A/PIN
- 2.2 额定电压: 48V DC
- 2.3 接触电阻: 30mΩ
- 2.4 绝缘电阻: 100MΩ MIN
- 2.5 耐电压: 500V AC
- 2.6 工作温度: -40°~85°

3. 机械特性

- 3.1 插拔力: 3~5KG

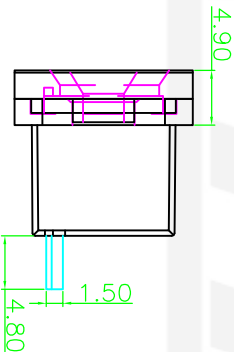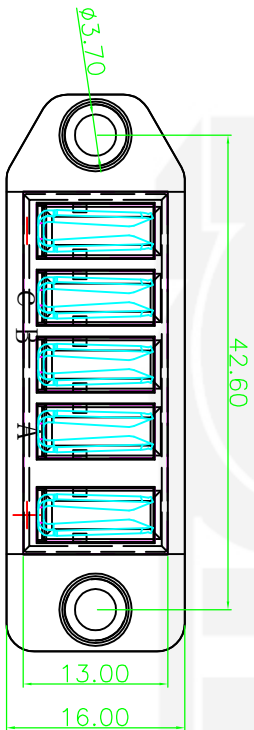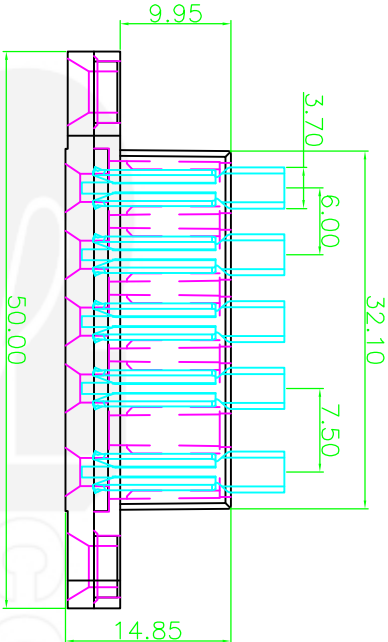

东莞市信音电子科技有限公司

DONGGUAN XINYIN ELECTRONIC TECHNOLOGY CO., LTD.

COMMCONNECTIVE
信音达®

PART NAME		CONNECTOR		DRAWING	X. L. SU	DWG. No.
PART NO.		SYCBGHF01P5DIP		CHECK	X. CHEN	REV.
UNIT :		TOLERANCE		ANGLE	APPROVAL	DATE
mm		X.XX ±0.05 X.XX ±0.05 X.XX ±0.05 X.XX ±0.05 X.XX ±0.05 X.XX ±0.05		0° ±3°	SCALE	PAGE
					3:1	1 OF 1