

RoHS
Compliant

B		A	
SYMBOL	REVISION	APPROVAL	DATE

SPECIFICATIONS


1. 产品材质
- 1.1 塑胶部分: PA66 (UL94V-0)
- 1.2 金属部分: 磷铜镀镍

2. 电气特性

- 2.1 额定电流: 15~20A/PIN
- 2.2 额定电压: 48V DC
- 2.3 接触电阻: 30mΩ
- 2.4 绝缘电阻: 100MΩ MIN
- 2.5 耐电压: 500V AC
- 2.6 工作温度: -40°~85°

3. 机械特性

- 3.1 插拔力: 3~5KG

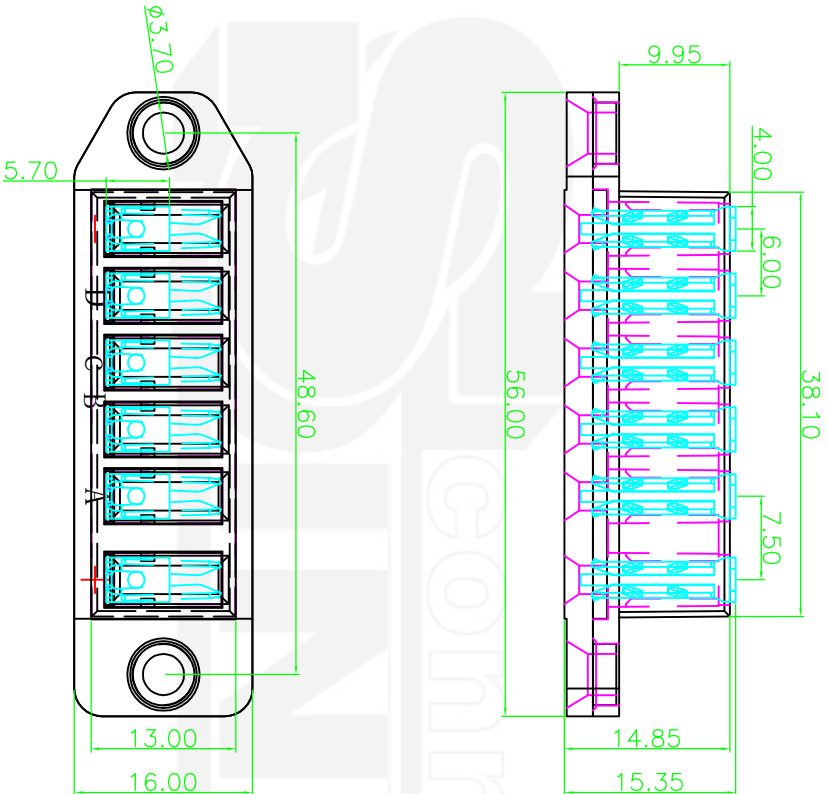

东莞市信音电子科技有限公司

DONGGUAN XINYIN ELECTRONIC TECHNOLOGY CO., LTD.

PART NAME		CONNECTOR		DRAWING		DWG. No.	
PART NO.		SYCBGHF01P6CSMT		CHECK	X. CHEN	REV.	A1

UNIT:		TOLERANCE		ANGLE		DATE	
mm		OTHERWISE		0° ±3°	SCALE	3:1	PAGE

TOLERANCE		OTHERWISE	
X.XX	±0.15 X.X	X.XX	±0.10 X.XX
X.XX	±0.10 X.XX	X.XX	±0.05 X.XX
X.XX	±0.05 X.XX	X.XX	±0.05 X.XX

ANGLE		SCALE		DATE	
0° ±3°	SCALE	3:1	PAGE	09-09-2025	1 OF 1

1 OF 1