

RoHS
Compliant

SYMBOL	REVISION	APPROVAL	DATE

备注:

1. 产品规格:

1-1. 额定电压:30V

1-2. 耐电压:1000V AC MIN.

1-3. 接触阻抗:30mΩ MAX. INITIAL;40mΩ MAX
AFTER 3000 CYCLES

1-4. 绝缘电阻:1000MΩ MIN

1-5. 工作温度:-25℃ TO +80℃


2. 材质:

2.1胶芯: PA9T UL94V-0/LCP BLACK

2.2端子: 合金铜, 镍底, GOLD

3. 所用材质须符合RoHS要求

PART NUMBER	PIN	Dim.A	Dim.B
SYCZM01P2R1H590	02pin	12.00	5.00
SYCZM01P3R1H590	03pin	17.00	10.00
SYCZM01P4R1H590	04pin	22.00	15.00
SYCZM01P5R1H590	05pin	27.00	20.00

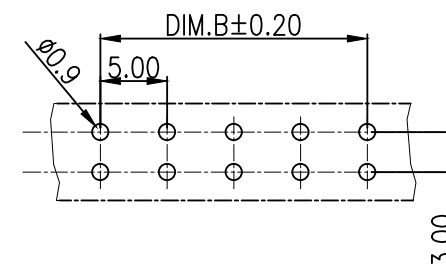

RECOMMENDED P.C.BOARD LAYOUT

SIN·YIN
信音达®

东莞市信音电子科技有限公司

DONGGUAN XINYIN ELECTRONIC TECHNOLOGY CO., LTD.

PART NAME		CONNECTOR		DRAWING	X. L. SU	DWG. No.	
PART NO.		SYCZM01R1H590系列		CHECK	X. CHEN	REV.	A1
	UNIT:	TOLERANCE	X. ±0.15 X." ±1°	ANGLE	APPROVAL	DATE	12-10-2023
	mm	OTHERWISE	X.X ±0.10 X.X" ±0.5° X.XX ±0.05 X.XX ±0.05° X.XXX ±0.005 X.XXX ±0.005°	0° ±3°	SCALE	PAGE	1 OF 1