

RoHS
Compliant

SYMBOL	REVISION	APPROVAL	DATE

备注:

1. 产品规格:

1-1. 额定电压:30V

1-2. 耐电压:1000V AC MIN.

1-3. 接触阻抗:30mΩ MAX. INITIAL;40mΩ MAX
AFTER 3000 CYCLES

1-4. 绝缘电阻:1000MΩ MIN




1-5. 工作温度:-25°C TO +80°C

2. 材质:

2.1胶芯: PA9T UL94V-0/LCP BLACK

2.2端子: 合金铜, 镍底, GOLD

3. 所用材质须符合RoHS要求

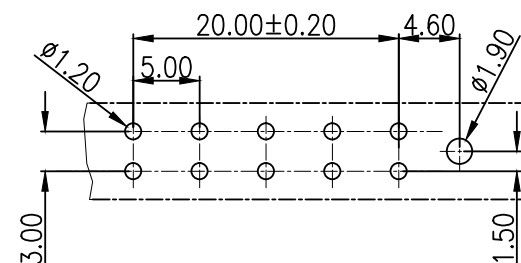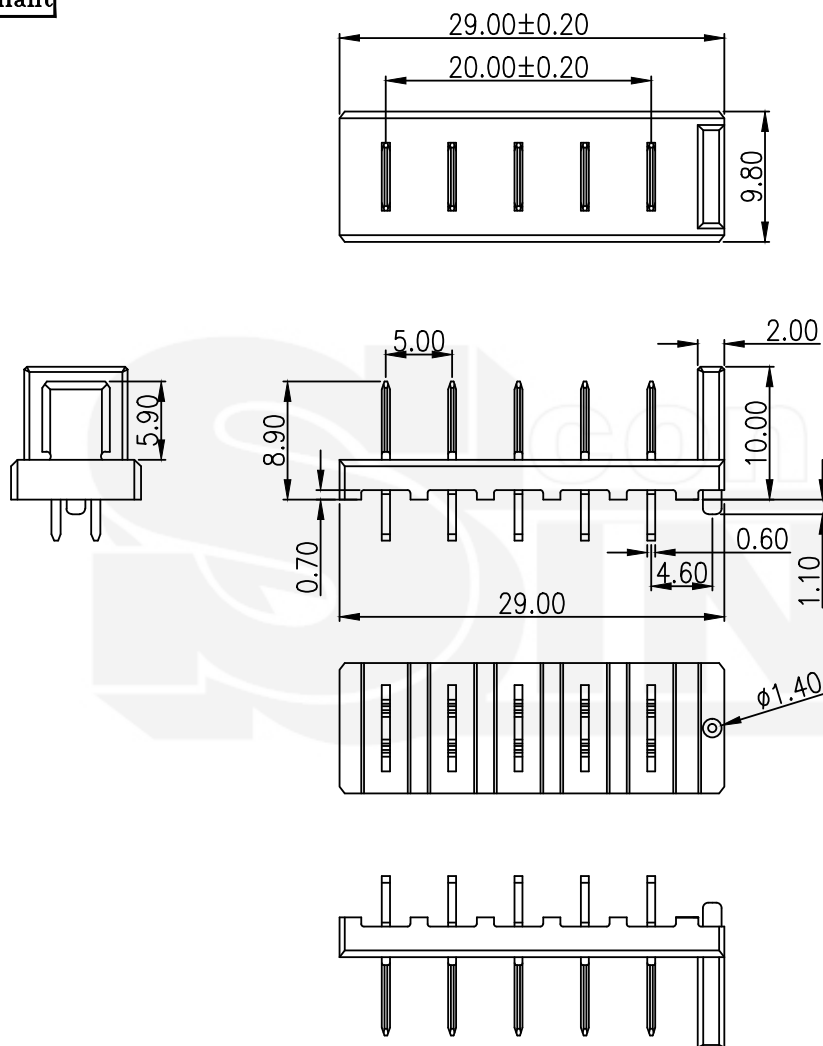

RECOMMENDED P.C. BOARD LAYOUT

SIN-YIN
信音达®

东莞市信音电子科技有限公司

DONGGUAN XINYIN ELECTRONIC TECHNOLOGY CO., LTD.

PART NAME		CONNECTOR		DRAWING	X. L. SU	DWG. No.	
PART NO.		SYCZM02P5R1H590		CHECK	X. CHEN	REV.	A1
	UNIT:	TOLERANCE	X. ±0.15 X. " ±1°	ANGLE	APPROVAL	DATE	12-10-2023
	mm	OTHERWISE	X. X ±0.10 X. X" ±0.5° X. XX ±0.05 X. XX ±0.05° X. XXX ±0.005 X. XXX ±0.005°	0° ±3°	SCALE	PAGE	1 OF 1