

RoHS
Compliant

SYMBOL	REVISION	APPROVAL	DATE

备注:

1. 产品规格:

1-1. 额定电压:30V

1-2. 耐电压:1000V AC MIN.

1-3. 接触阻抗:30mΩ MAX. INITIAL;40mΩ MAX
AFTER 3000 CYCLES

1-4. 绝缘电阻:1000MΩ MIN

1-5. 工作温度:-25℃ TO +80℃


2. 材质:

2.1胶芯: PA9T UL94V-0/LCP BLACK

2.2端子: 合金铜, 镍底, GOLD

3. 所用材质须符合RoHS要求

PART NUMBER	PIN	Dim.A	Dim.B	Dim.C
SYCZF01P2DIP	02pin	10.70	10.20	5.00
SYCZF01P3DIP	03pin	15.70	15.20	10.00
SYCZF01P4DIP	04pin	20.70	20.20	15.00
SYCZF01P5DIP	05pin	25.70	25.20	20.00

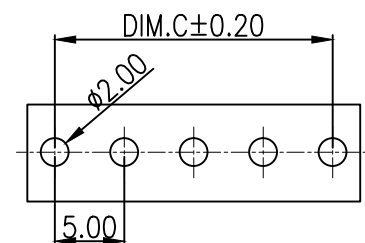

RECOMMENDED P.C. BOARD LAYOUT

SIN-YIN
信音达®

东莞市信音电子科技有限公司

DONGGUAN XINYIN ELECTRONIC TECHNOLOGY CO., LTD.

PART NAME		CONNECTOR			DRAWING	X. L. SU	DWG. No.	
PART NO.		SYCZF01DIP系列			CHECK	X. CHEN	REV.	A1
	UNIT :	TOLERANCE	X. ±0.15 X.° ±1° X.X ±0.10 X.X° ±0.5° X.XX ±0.05 X.XX ±0.05° X.XXX ±0.005 X.XXX ±0.005°	ANGLE	APPROVAL		DATE	12-10-2023
	mm	OTHERWISE		0° ±3°	SCALE	3:1	PAGE	1 OF 1