



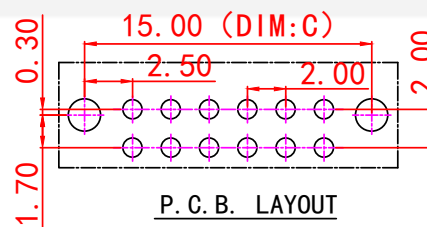
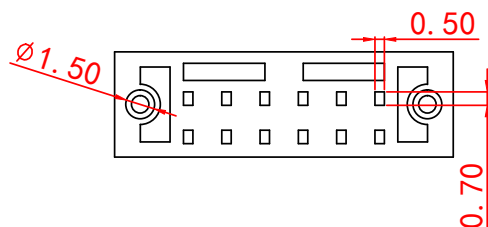


RoHS
Compliant

SYMBOL	REVISION	APPROVAL	DATE



No: of pins	Dimension		
	DIM. A	DIM. B	DIM. C
03	11.70	9.30	9.00
04	13.70	11.30	11.00
05	15.70	13.30	13.00
06	17.70	15.30	15.00
07	19.70	17.30	17.00
08	21.70	19.30	19.00
09	23.70	21.30	21.00
10	25.70	23.30	23.00
11	27.70	25.30	25.00
12	29.70	27.30	27.00

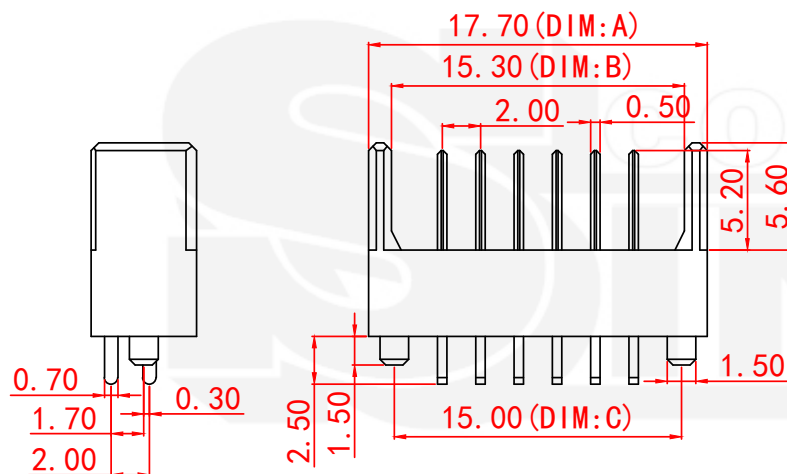

NOTE:

Material

Insulator: LCP

Contact: C2680

Contact Plated: Gold over Nickel or Tin

Specification

Current rating: 7A/PIN

Instant CURRENT: 10A/PIN

Contact Resistance: 30mΩ

Insulation Resistance: 100MΩ

Dielectric Voltage: 500V

Operdting Temperature: -40° ~105°

2	HOUSING	LCP	1	GRAY
1	CONTACT TERMINAL	C2680	6	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

SIN·YIN
信音达®

东莞市信音电子科技有限公司

DONGGUAN XINYIN ELECTRONIC TECHNOLOGY CO., LTD.

PART NAME	CONNECTOR		DRAWING	X. L. SU	DWG. No.	
PART NO.	SYCAM08M5系列		CHECK	X. CHEN	REV.	A1
UNIT: mm	TOLERANCE	X. ±0.15 X. ±1° X.X ±0.10 X.X ±0.5° X.XX ±0.05 X.XX ±0.05° X.XXX ±0.005 X.XXX ±0.005°	ANGLE	APPROVAL	DATE	12-10-2023
	OTHERWISE		0° ±3°	SCALE	PAGE	1 OF 1