







RoHS
Compliant

SYMBOL	REVISION	APPROVAL	DATE

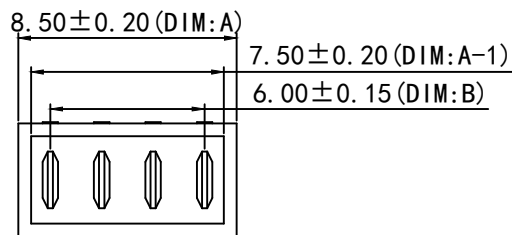

3D VIEW

No.of Pins	Dimension		
	DIM.A	DIM.B	DIM.C
02	4.50	2.00	3.90
03	6.50	4.00	5.90
04	8.50	6.00	7.90
05	10.50	8.00	9.90
06	12.50	10.00	11.90
07	14.50	12.00	13.90
08	16.50	14.00	15.90
09	18.50	16.00	17.90
10	20.50	18.00	19.90

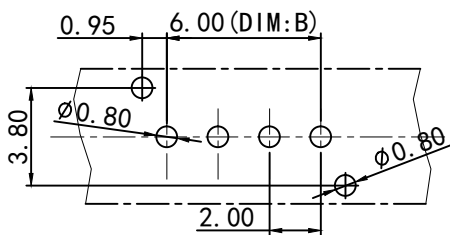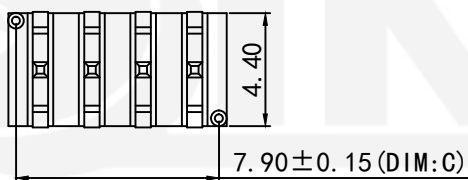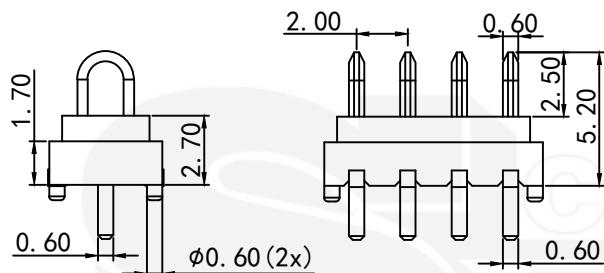

RECOMMENDED P.C.BOARD LAYOUT

Material
Insulator : LCP
Contact : C2680
Contact Plated : Gold over Nickel or Tin
Specification
Current Rating : 3A
Instant Current : 5A
Contact Resistance : 30mΩ
Insulation Resistance : 100MΩ
Dielectric Voltage : 500V
Operating Temperature : -40°~105°

2	HOUSING	LCP	1	GRAY
1	CONTACT TERMINAL	C2680	4	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

SIN·YIN
信音达®

东莞市信音电子科技有限公司

DONGGUAN XINYIN ELECTRONIC TECHNOLOGY CO., LTD.

PART NAME		CONNECTOR		DRAWING	X. L. SU	DWG. No.	
PART NO.		SYCAM20R1H250系列		CHECK	X. CHEN	REV.	A1
UNIT: mm	TOLERANCE	X. ±0.15 X. ±1°	ANGLE	APPROVAL		DATE	12-10-2023
	OTHERWISE	X.X ±0.10 X.X ±0.5° X.XX ±0.05 X.XX ±0.05° X.XXX ±0.005 X.XXX ±0.005°	0° ±3°	SCALE	3:1	PAGE	1 OF 1