



RoHS
Compliant




SYMBOL	REVISION	APPROVAL	DATE

SPECIFICATIONS


- ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING: DC 12V 3A
 - 1-2. CONTACT RESISTANCE: 30mΩ MAX (INITIAL)
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - 1-4. INSULATION RESISTANCE: 500MΩ MIN, MEASURED BY 500V DC
- LIFE TEST: MECHANICAL LIFE TEST 5,000 CYCLES.

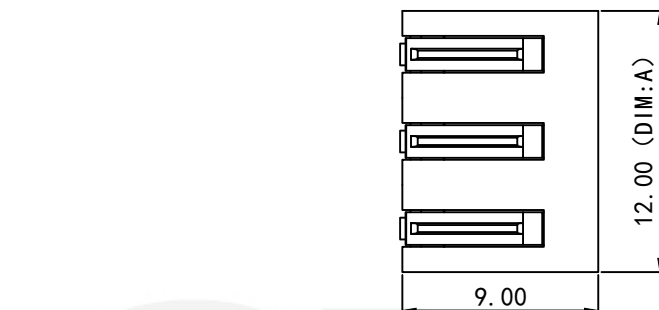

3D VIEW

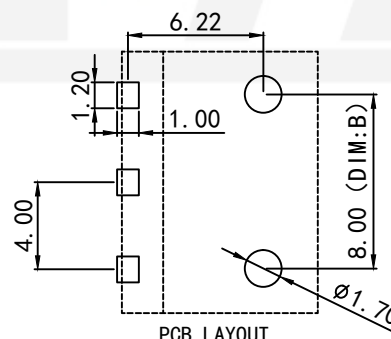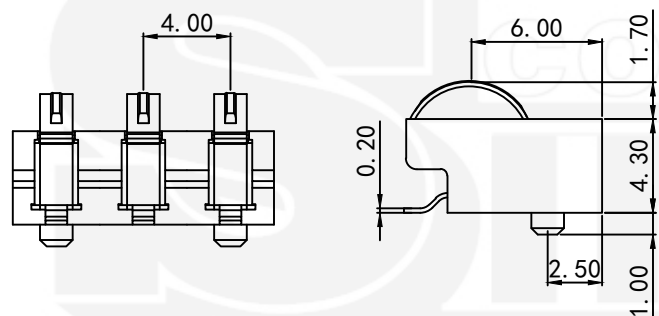

PCB LAYOUT

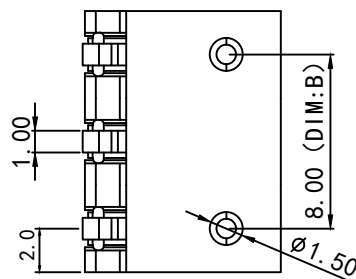

型号规格	DIM:A	DIM:B
SYCBCP1PH40HD600:滑动	4.00	2.80
SYCBCP2PH40HD600:滑动	8.00	4.00
SYCBCP3PH40HD600:滑动	12.00	8.00
SYCBCP4PH40HD600:滑动	16.00	12.00
SYCBCP5PH40HD600:滑动	20.00	16.00
SYCBCP6PH40HD600:滑动	24.00	20.00
SYCBCP7PH40HD600:滑动	28.00	24.00
SYCBCP8PH40HD600:滑动	32.00	28.00
SYCBCP9PH40HD600:滑动	36.00	32.00
SYCBCP10H40HD600:滑动	40.00	36.00

2	HOUSING	LCP	1	GRAY
1	CONTACT TERMINAL	PHOSPHOR BRONZE	3	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

SIN·YIN
信音达®

东莞市信音电子科技有限公司

DONGGUAN XINYIN ELECTRONIC TECHNOLOGY CO., LTD.

PART NAME	CONNECTOR	DRAWING	X. L. SU	DWG. No.	
PART NO.	SYCBCPXXH40HD600:滑动	CHECK	X. CHEN	REV.	A1
UNIT:	TOLERANCE	ANGLE	APPROVAL	DATE	12-10-2023
mm	OTHERWISE	0° ±3°	SCALE	PAGE	1 OF 1