


REV NO./版次	REVISION NOTE/修订注释	DATE/日期	SIGNATURE/签名

ELECTRICAL CHARACTERISTICS

1. RATING: DC 50V 0.1A
2. CONTACT RESISTANCE: 100mΩ MAX
3. INSULATION RESISTANCE: 100MΩ MIN
4. DIELECTRIC STRENGTH: AC 250V(50~60Hz)/60S

MECHANICAL CHARACTERISTICS

1. PRACTICAL TEMPERATURE RANG: -40℃~+85℃
2. OPERATING FORCE: 180±50gf
3. MECHANICAL LIFE: 20,000 cycles

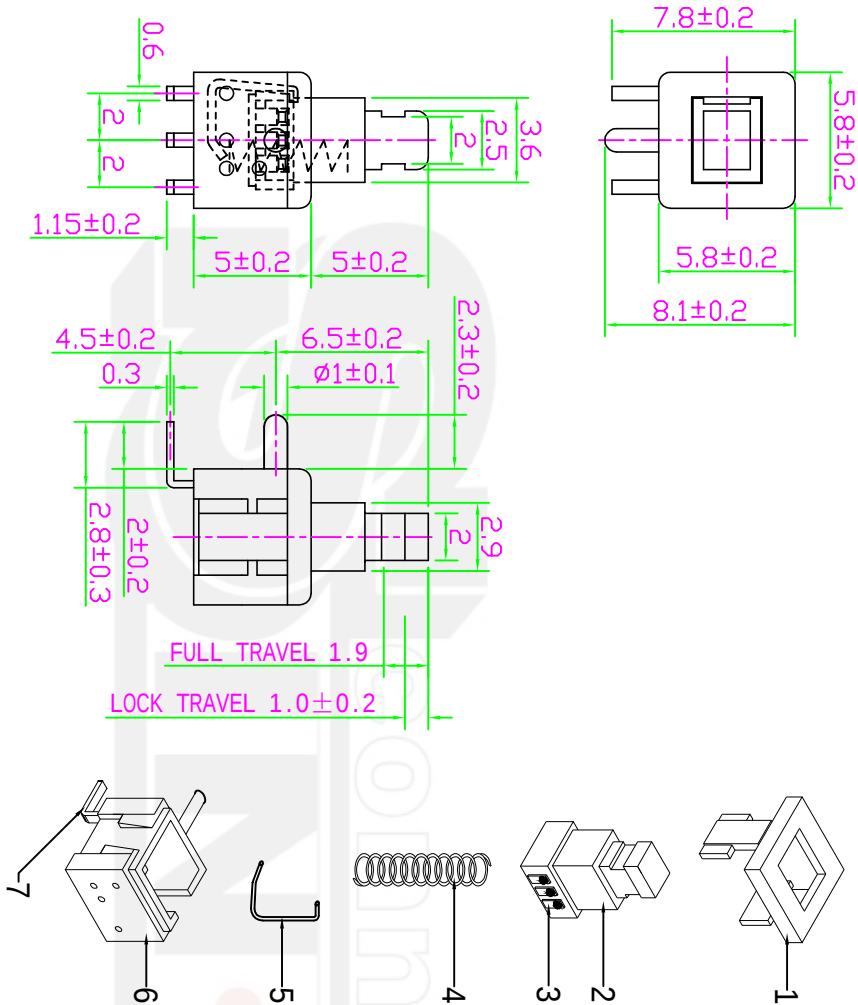

8				
7	TERMINAL	BRASS STRIP	3	Ag PLATED
6	CASE	PA66	1	GRAY
5	LOCK PIN	SUS WIRE	1	NATURAL
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	BRONZE	1	Ag PLATED
2	KNOB	PBT	1	WHITE
1	COVER	PPA	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

DONGGUAN XINYIN ELECTRONIC TECHNOLOGY CO.,LTD.				
GENERAL TOLERANCE 未指的公差		TITLE 名称 SYCPB22E62L180GF		
X. ± 0.15	X. ° ± 5°	PART NO. 零件编号 DWG NO. 图纸编号		
.X ± 0.10	.X ° ± 2°			
.XX ± 0.05	.XX ° ± 1°			
.XXX ± 0.02	.XXX ° ± 0.5°	DRAWN 设计 UNIT 单位 (mm)		
APPROVAL 审批	CHECKED 核准	SCALE 比例 1:1		PROJ. 项目 REV.