

RoHS
Compliant

B		A	
SYMBOL	REVISION	APPROVAL	DATE

SPECIFICATIONS




1. 产品材质
- 1.1 塑胶部分:PA66 (UL94V-0)
- 1.2 金属部分:磷铜镀镍

2. 电气特性

- 2.1 额定电流:15~20A/PIN
- 2.2 额定电压:48V DC
- 2.3 接触电阻:30mΩ
- 2.4 绝缘电阻:100MΩ MIN
- 2.5 耐电压:500V AC
- 2.6 工作温度:-40°~85°

3. 机械特性

- 3.1 插拔力:3~5KG

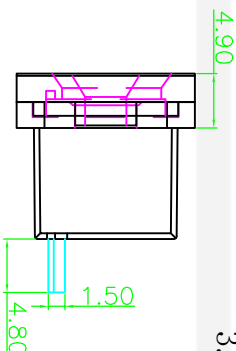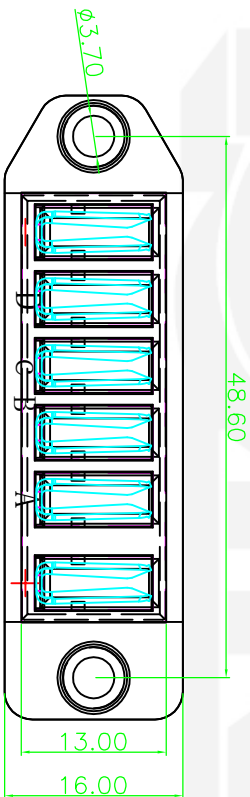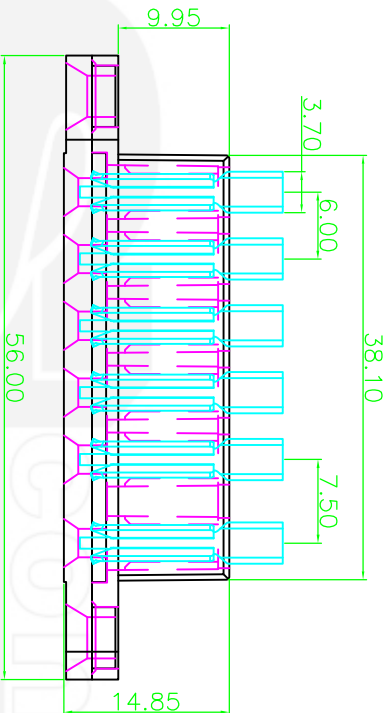

东莞市信音电子科技有限公司

DONGGUAN XINYIN ELECTRONIC TECHNOLOGY CO., LTD.

PART NAME
PART NO.
CONNECTOR
SYCBGH01P6DIP

DRAWING
X. L. SU
DWG. No.

CHECK
X. CHEN
REV.
A1

ANGLE
APPROVAL
DATE
09-09-2025

SCALE
3:1
PAGE
1 OF 1

TOLERANCE
OTHERWISE
X.XX ±0.15 X.X° ±1°
X.XX ±0.10 X.X° ±0.5°
X.XX ±0.05 X.XX ±0.05°
X.XX ±0.005 X.XX ±0.005°

UNIT:
mm

信音达
XIN·YIN